
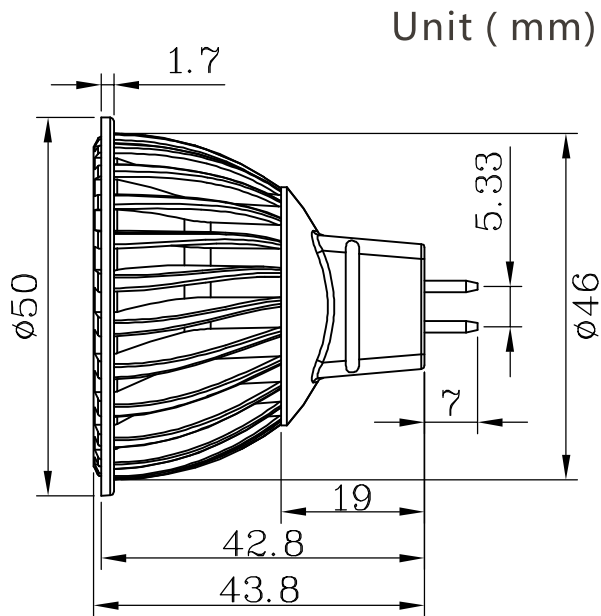


Item No.LED SPOTLIGHT –MR16–5W

Features


- 1. Adopt single COB LED with high lumen output.
- 2. Energy save, adopt high efficiency current constant driver, low power consumption.
- 3. Long lifespan:30000 hours.
- 4. High weather ability, not sensitive for the humidity, can be used within the wide range of temperature.
- 5. Eco-friendly, no heavy metal and harmful gas.
- 6. No flicker, instant start, no stroboflash, protect the eyes.
- 7. CE and RoHs approved.

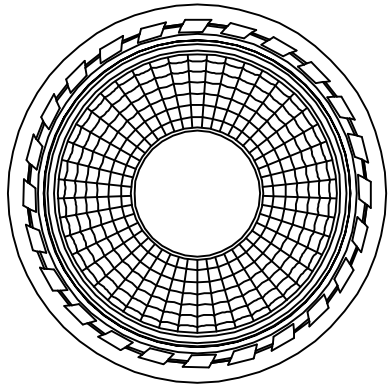


Specification

Item	Symbol	Value	Unit
Power	P	4.3±10%	W
Voltage	VOLT	AC/DC12V	V
Current	I	0.36A MAX	A
Frequency Range	F	50/60Hz	Hz
Power Factor	Factor	1	Pf
Conversion Efficiency	η	0.85	η
Beam Angle	DEGREE	90	DEGREE
Working Temperature	TOPR	-20~50	°C
Relative Humidity	RH	10%~90%	RH
Luminous flux(white color)	LM	330	LM
Color Temperature	T	2700-6500K	K
Life-span	HOUR	30000	HOUR
LED Qty	PCS	1	PCS
LED Power	P	3	W


Testing report

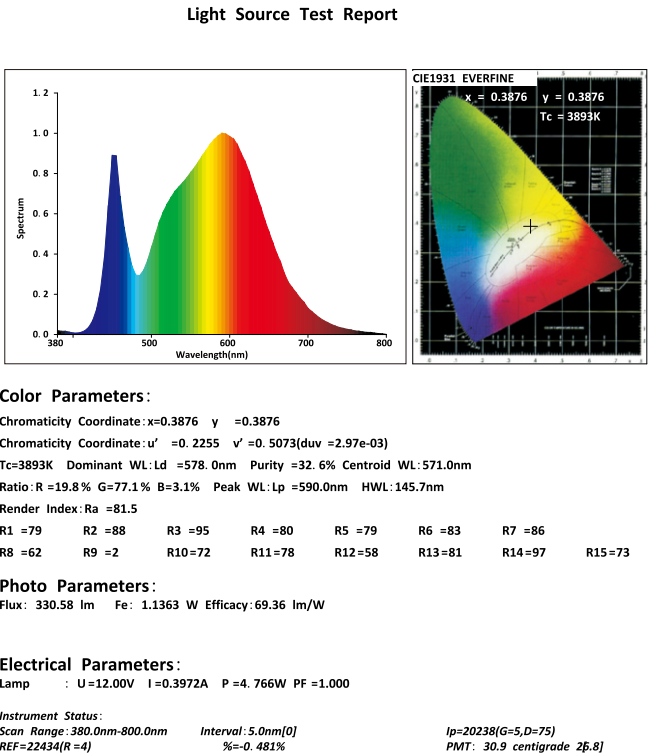

Luminous intensity distribution diagram

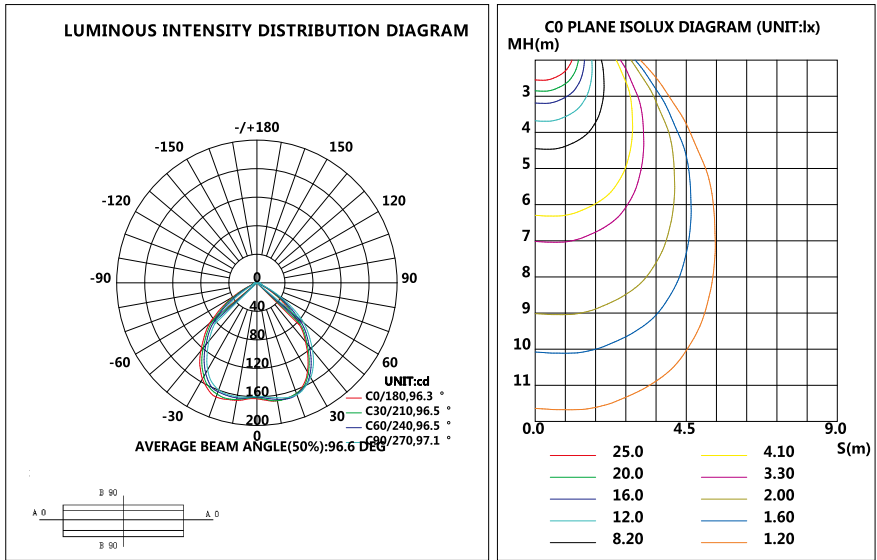

Illuminance

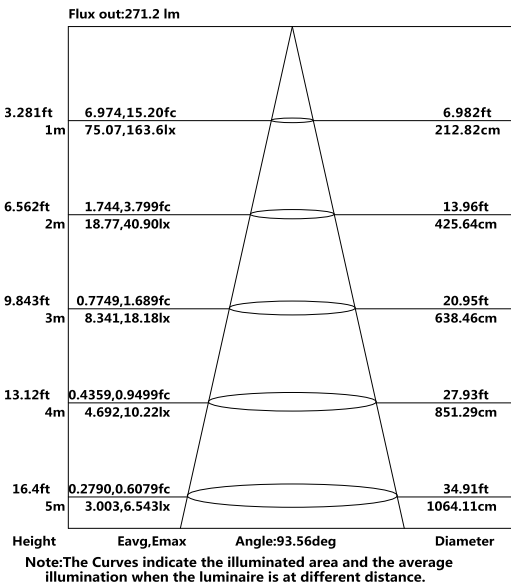


Packing information

item No	box size	Unit weight	Quantity/carton	Carton size	Weight/carton
LED SPOTLIGHT -MR16-5W	50x50x70mm	0.056Kg	200PCS	590x295x335mm	11.8Kg

Notice

If input AC/DC12V, can only connect to MR16 base.

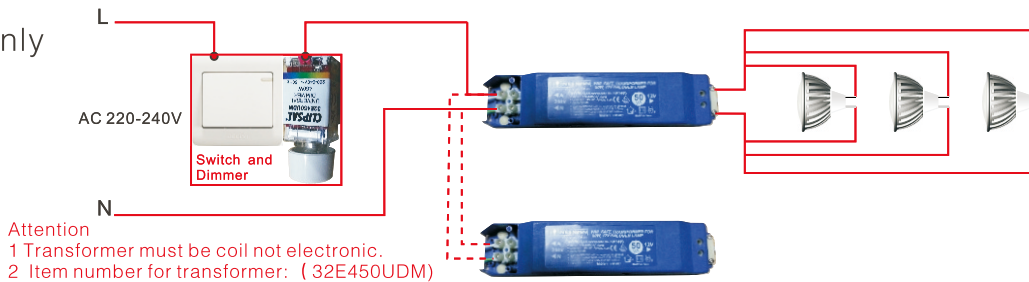

Wiring diagram